

# General Specifications

## Analog I/O Modules



GS 34P02Q31-01E

### ■ GENERAL

This GS covers the hardware specifications of analog input/output modules that can be installed in an FCN autonomous controller.

For connection with field equipment, refer to GS 34P02Q30-01E "Field Connection Specifications" and T1 34P02Q91-01E "FCN/FCJ Installation Guide."

### ■ STANDARD SPECIFICATIONS

#### ● Current/Voltage Input Modules (Non-Isolated)

These modules mainly receive 4 to 20 mA DC or 1 to 5 V DC normalized signals from 2-wire/4-wire transmitters.

Items	Specifications			
	Model	NFAI141 (*3)	NFAV141	NFAV142
Number of input channels		16, non-isolated	16, non-isolated (differential input)	16, non-isolated
Input signal		4 to 20 mA	1 to 5 V (allowable common mode voltage $\pm 1$ V or less)	-10 to 10 V
Allowable input current/voltage		27 mA	$\pm 7.5$ V	$\pm 13$ V
Overcurrent protection		Provided	—	—
Input resistance	Power ON	250 $\Omega$ (*1)	1 M $\Omega$ or more	1 M $\Omega$ or more
	Power OFF	500 k $\Omega$ or more	340 k $\Omega$ or more	660 k $\Omega$ or more
Accuracy		$\pm 0.1\%$ of full scale		
Data refresh cycle		10 ms		
Input step response time		100 ms		
Transmitter power supply		22.8 to 26.4 V (output current limit: 27 mA) (*2)	—	—
Setting of 2-wire or 4-wire transmitter		For each channel by setting pin	—	—
Temperature drift		Max. $\pm 0.01\%/^{\circ}\text{C}$		
Maximum current consumption		310 mA (5 V DC)	350 mA (5 V DC)	350 mA (5 V DC)
		450 mA (24 V DC)	—	—
Weight		0.2 kg	0.2 kg	0.2 kg
External connection		Pressure clamp terminal, MIL connector cable		
HART Communication(*4)		Available	—	—

T01E.EPS

\*1: A voltage drop of up to 3 V may occur due to the internal protection circuit.

\*2: Depends on the actual voltage applied by analog field power supply (24 V DC) via base module.

\*3: When this I/O module is used with 2-wire transmitter, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.

\*4: For HART function specifications, refer to GS 34P02Q53-01E HART Communication Functions.

● **Current/Voltage I/O Modules (Non-Isolated)**

These modules provide eight inputs and eight outputs to support up to eight loops.

Items	Specifications			
	Model	NFAI841(*5)		NFAB841(*5)
Number of I/O channels	8-channel input/8-channel output, non-isolated		8-channel input/8-channel output, non-isolated (differential input)	
I/O signal	Input: 4 to 20 mA	Output: 4 to 20 mA	Input: 1 to 5 V (allowable common mode voltage $\pm 1$ V or less)	Output: 4 to 20 mA
Allowable input current/voltage	25 mA	—	$\pm 7.5$ V	—
Overcurrent protection	Provided	—	—	—
Input resistance	Power ON	250 $\Omega$ (*1)	—	1 M $\Omega$ or more
	Power OFF	500 k $\Omega$ or more	—	340 k $\Omega$ or more
Allowable load resistance	—	0 to 750 $\Omega$ (*3)	—	0 to 750 $\Omega$
Circuit-open detection	—	0.65 mA or less	—	0.65 mA or less
Accuracy	$\pm 0.1\%$ of full scale	$\pm 0.3\%$ of full scale	$\pm 0.1\%$ of full scale	$\pm 0.3\%$ of full scale
Data refresh cycle	10 ms			
Input step response time	100 ms			
Output step response time	40 ms			
Output fallback (*4)	—	Set for each channel (*3)	—	Set for each channel (*3)
Transmitter power supply	22.8 to 26.4 V (output current limit: 27 mA)(*2)		—	
Setting of 2-wire or 4-wire transmitter	For each channel by setting pin		—	
Temperature drift	Max. $\pm 0.01$ %/ $^{\circ}\text{C}$			
Maximum current consumption	310 mA (5 V DC)		310 mA (5 V DC)	
	500 mA (24 V DC)		250 mA (24 V DC)	
Weight	0.3 kg			
External connection	Pressure clamp terminal, MIL connector cable			
HART Communication(*6)	Available		—	

T02E.EPS

- \*1: A voltage drop by up to 3 V may occur due to the internal protection circuit.
- \*2: Depends on the actual voltage applied by analog field power supply (24 V DC) via base module.
- \*3: HOLD: To hold output in which fallback is detected.  
SETV: To output a specified value when fallback is detected.
- \*4: Select fallback [Yes/No] for each module.  
If [Yes] is selected for fallback, set [HOLD/SETV] for each channel.  
Fallback detection time: 4 seconds
- \*5: When this I/O module is used, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.
- \*6: For HART function specifications, refer to GS 34P02Q53-01E HART Communication Functions.

● **Voltage Output Module (Non-Isolated)**

This module outputs -10 V to +10 V DC.

Items	Specifications
Model	NFAV542
Number of output channels	16, non-isolated
Output signal	-10 to 10 V
Allowable load resistance	More than 10 kΩ
Accuracy	±0.3% of full scale
Data refresh cycle	10 ms
Output step response time	40 ms
Output fallback (*2)	Set for each channel (*1)
Temperature drift	Max. ±0.01%/°C
Maximum current consumption	450 mA (5 V DC)
Weight	0.2 kg
External connection	Pressure clamp terminal, MIL connector cable

T03E.EPS

- \*1: HOLD: To hold output in which fallback is detected.  
SETV: To output a specified value when fallback is detected.
- \*2: Select fallback [Yes/No] for each module.  
If [Yes] is selected for fallback, set [HOLD/SETV] for each channel.  
Fallback detection time: 4 seconds

● **Current Input Modules (Isolated)**

Input of 4 to 20 mA signals of 16 channels.

Items	Specifications	
Model	NFAI143 (*1)	
Number of input channels	16-channel input, isolated	
Input signal	4 to 20 mA	
Allowable input current	24 mA	
Withstanding voltage	Between input and system: 1500 V AC (*3)	
Overcurrent protection	Provided	
Input resistance	Power ON	250 Ω
	Power OFF	500 kΩ or more
Accuracy	±0.1% of full scale	
Data refresh cycle	10 ms	
Input step response time	100 ms	
Transmitter power supply	24.0 to 25.5 V (output current limit:25 mA)	
Setting of 2-wire or 4-wire transmitter	For each channel by setting pin	
Temperature drift	Max. ±0.01%/°C (Max)	
Maximum current consumption	230 mA (5 V DC)	
	540 mA (24 V DC)	
Weight	0.3 kg	
External connection	Pressure clamp terminal, MIL connector cable (*3)	
HART Communication(*2)	Available	

T21E.EPS

- \*1: When this I/O module is used, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.
- \*2: For HART function specifications, refer to GS 34P02Q53-01E HART Communication Functions.
- \*3: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

● **Current Output Modules (Isolated)**

Output of 4 to 20 mA electric currents of 16 channels.

Items	Specifications
Model	NFAI543 (*3)
Number of output channels	16-channel output, isolated
Output signal	4 to 20 mA
Withstanding voltage	Between output and system: 1500 V AC (*5)
Allowable load resistance	0 to 750 Ω
Circuit-open detection	0.65 mA or less
Accuracy	±0.3% of full scale
Data refresh cycle	10 ms
Output step response time	100 ms
Output fallback (*2)	Set for each channel (*1)
Temperature drift	Max. ±0.01%/°C
Maximum current consumption	230 mA (5 V DC)
	540 mA (24 V DC)
Weight	0.4 kg
External connection	Pressure clamp terminal, MIL connector cable (*5)
HART Communication(*4)	Available

T22E.EPS

- \*1: HOLD: To hold output in which fallback is detected.  
SETV: To output a specified value when fallback is detected.
- \*2: Select fallback [Yes/No] for each module.  
If [Yes] is selected for fallback, set [HOLD/SETV] for each channel.  
Fallback detection time: 4 seconds
- \*3: When this I/O module is used, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.
- \*4: For HART function specifications, refer to GS 34P02Q53-01E HART Communication Functions.
- \*5: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

● **Voltage Input Module (Isolated)**

This module inputs -10 V to +10 V DC.

Items		Specifications
Model		NFAV144
Number of input channels	16, Isolated	
Input signal	1 to 5 V	-10 to +10 V (*1)
Switching input signals	1 to 5 V/-10 to +10 V : Set for channels all together	
Allowable input voltage	-30 to +30 V	
Withstanding voltage	Between input and system: 1500 V AC (*2)	
Input resistance	Power ON	1 MΩ
	Power OFF	200 kΩ
Accuracy	±0.1% of full scale	
Data refresh cycle	10 ms	
Input step response time	100 ms	
Temperature drift	Max. ±0.01%/°C	
Maximum current consumption	500 mA (5 V DC)	
Weight	0.2 kg	
External connection	Pressure clamp terminal, MIL connector cable (*2)	

\*1: Specifying “-10 V to +10 V” as an input signal enables you to set the input range by the resource configurator. T25E.EPS

\*2: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

● **Voltage Output Module (Isolated)**

This module outputs -10 V to +10 V DC.

Items		Specifications
Model		NFAV544
Number of output channels	16, Isolated	
Output signal	-10 to +10 V	
Withstanding voltage	Between input and system: 1500 V AC (*3)	
Allowable load resistance	More than 5 kΩ	
Accuracy	±0.3% of full scale	
Data refresh cycle	10 ms	
Output step response time	40 ms	
Output fallback (*2)	Set for each channel (*1)	
Temperature drift	Max. ±0.01%/°C	
Maximum current consumption	860 mA (5 V DC)	
Weight	0.2 kg	
External connection	Pressure clamp terminal, MIL connector cable (*3)	

\*1: HOLD: To hold output in which fallback is detected.

SETV: To output a specified value when fallback is detected.

\*2: Select fallback [Yes/No] for each module.

If [Yes] is selected for fallback, set [HOLD/SETV] for each channel.

Fallback detection time: 4 seconds

\*3: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable. T26E.EPS

● **TC Input/RTD Input Modules (Isolated)**

These modules receive mV, thermocouple (TC) or RTD signals.

Items	Specifications	
	Model	
Number of input channels	NFAT141 (*6)	NFAR181
Number of input channels	16, isolated	12, isolated
Input signal	TC: JIS C1602:1995, IEC60584:1989 Type J, K, E, B (*1), R, S, T, N JIS C1602:1981, IEC60584:1977 Type J, K, E, B (*1), R, S, T, N IEC60584:1977 Type N mV: -100 to 150 mv, -20 to 80 mv	RTD: JIS C 1604:1997, IEC 60751:1995 Pt100 (three-wire type) JIS C 1604:1989, IEC 60751:1986 Pt100 (three-wire type) JIS C 1604:1989 JPt100 (three-wire type)
Switching input signals	TC/mV can be set individually for CH1 to CH16.	—
Allowable input voltage	±5 V	±5 V
Withstanding voltage	Between input and system: 1500 V AC (*7)	Between input and system: 1500 V AC
Input resistance	Power ON	2 MΩ or more
	Power OFF	2 MΩ or more
Accuracy	Thermocouple inputs: ±0.03% of full scale (for -20 to 80 mV) mV inputs: ±0.032% of full scale (for -100 to 150 mV)	±0.03% of full scale (for 0 to 400 Ω)
Allowable total resistance of signal source plus wiring	1000 Ω or less	40 Ω or less (wiring resistance per wire)(*2)
Effect of allowable signal source resistance (1000 Ω)	±20 μV	—
Reference junction compensation accuracy	Within ±1°C (*3, 4)	—
Measurement current	—	1 mA
Temperature drift	Thermocouple inputs: Max. ±30 ppm/°C mV inputs: Max. ±32 ppm/°C	Max. ±30 ppm/°C
Data refresh cycle	1sec	
Burn-out	All channels can be set together. Setting: Not available/available (UP/DOWN) detection time: 60 seconds	
Maximum current consumption	450 mA (5 V DC)	450 mA (5 V DC)
Weight	0.2 kg	
External connection	Pressure clamp terminal, MIL connector cable (*5)(*7)	Pressure clamp terminal

T04E.EPS

\*1: Type B does not carry out temperature compensation and can not measure under 44°C

\*2: Each wiring resistance should be equal.

\*3: This accuracy changes due to the installation condition.

If measured temperature is lower than 0°C, multiply the above value by the following coefficient (K):

$$K = \frac{\text{Thermoelectromotive force per degree at } 0^\circ\text{C}}{\text{Thermoelectromotive force per degree at measured temperature}}$$

F01E.EPS

\*4: Reference junction compensation accuracy varies depending on the temperature environment of pressure clamp terminal.

**Specifications for Node only**

Temperature Environment	Reference Junction Compensation accuracy
-20 to 15 °C	± 2 °C
15 to 45 °C	± 1 °C
45 to 70 °C	± 2 °C

T05E.EPS

\*5: Use a MIL connector cable for only mV input.

\*6: The NFAT141 thermocouple input module imposes limitations in installation. See "Restrictions and Precautions on Installation" on page 10.

\*7: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

● **Current Input Module and Current I/O Module (Isolated Channels)**

The Current Input Module receives signals of 4 to 20 mA. The Current I/O Module receives and outputs signals of 4 to 20 mA. These two modules are isolated between the input/output signals and the system as well as between channels.

Items	Specifications		
	Model	NFAI135 (*5)	NFAI835 (*5)
Number of I/O channels	8-channel input, isolated channels		4-channel input/4-channel output, isolated channels
I/O signal	4 to 20 mA		Input: 4 to 20 mA      Output: 4 to 20 mA
Allowable input current	25 mA		25 mA      —
Overcurrent protection	Provided		Provided      —
Withstanding voltage	Between input/output and system: 500 V AC, between channel: 500 V AC (*7)		
Input resistance	Power ON	250 Ω (*1)	
	Power OFF	500 kΩ or more	
Allowable load resistance	—	—	0 to 750 Ω
Circuit-open detection	—	—	0.65 mA or less
Accuracy	±0.1% of full scale		Inputs: ±0.1% of full scale      Outputs: ±0.3% of full scale
Data refresh cycle	10 ms		
Input step response time	100 ms	100 ms	—
Output step response time	—	—	100 ms
Output fallback (*4)	—	—	Set for each channel(*3)
Transmitter power supply	20.2 to 29.3 V (*2)		20.2 to 29.3 V(*2)      —
Temperature drift	Max. ±0.01%/ °C		
Maximum current consumption	360 mA (5 V DC)		360 mA (5 V DC)
	450 mA (24 V DC)		450 mA (24 V DC)
Weight	0.3 kg		
External connection	Pressure clamp terminal, MIL connector cable (*7)		
HART Communication(*6)	Available		Available

T06E.EPS

- \*1: A voltage drop by up to 0.2 V may occur due to the internal protection circuit.
- \*2: Depends on the actual voltage applied by analog field power supply (24 V DC) via base module.
- \*3: HOLD: To hold output in which fallback is detected.  
SETV: To output a specified value when fallback is detected.
- \*4: Select fallback [Yes/No] for each module.  
If [Yes] is selected for fallback, set [HOLD/SETV] for each channel.  
Fallback detection time: 4 seconds
- \*5: When this I/O module is used, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.
- \*6: For HART function specifications, refer to GS 34P02Q53-01E HART Communication Functions.
- \*7: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

● **Pulse Input Module (Isolated Channels)**

This module receives contact ON/OFF, voltage pulse and current pulse. This is isolated between the input signals and the system as well as between channels.

Items	Specifications
<b>Model</b>	<b>NFAP135 (*5)</b>
Number of input channels	8, isolated channels
Input signal (*1)	2-wire type: Contact ON/OFF, voltage pulse, current pulse (possible to supply transmitter power) 3-wire type: Power-supply-type voltage pulse
Input frequency	0 to 10 kHz (*2)
Withstanding voltage	Between input and system: 500 V AC, between channels: 500 V AC (*6)
Minimum input pulse width	40 μs
Input signal level	Contact input Open/close levels of relay contact and transistor contact Open: 100 kΩ or more, Close: 200 Ω or less Contact capacity When supplying 12 V DC: 15 V DC 15 mA or more When supplying 24 V DC: 30 V DC 30 mA or more Voltage/current pulse input (Current input is converted to voltage.) VH-VL (voltage swing): 3 V or greater where VH: 3 to 24 V VL: Ranges from -1 to 8 V Signal source resistance: 1 kΩ or less
Shunt resistance	Select from OFF/200/500/1000 Ω. (Open when power is OFF) (*1)
Pull-up resistance	68 kΩ (12 V DC or 24 V DC)
Data refresh cycle	2 ms
Filter function	Can select a filter that eliminates chattering (*3).
Transmitter power supply	Can select 24 V DC/12 V DC. Limiter value 12 V DC ±10 %: 40 mA, 24 V DC ±10 %: 30 mA (*4)
Maximum current consumption	300 mA (5 V DC) 400 mA (24 V DC)
Weight	0.3 kg
External connection	Pressure clamp terminal, MIL connector cable (*6)

- \*1: Connection methods and other parameters (transmitter power supply and shunt resistance) depend on the input mode. For details, refer to example of connection methods and other settings in the input mode. T07E.EPS
- \*2: 0 to 800 Hz for an open-collector contact input.
- \*3: The maximum input frequency is lower than specified when the filter for eliminating chattering is used.
- \*4: Depends on the actual voltage applied by analog field power supply (24 V DC) via base module.
- \*5: When this I/O module is used, 24 V DC needs to be supplied to an analog field power supply terminal of the power supply module.
- \*6: The withstanding voltage for using MIL connector cable depends on the electrical specifications of its cable.

**Table Connections and settings in input mode for pulse input module (NFAP135)**

No.	Input mode (*1)	Connection	Transmitter power supply		Shunt resistance			
			12 V	24 V	OFF	200 Ω	500 Ω	1000 Ω
1	Dry contact pulse(open-collector contact) (*2)	INB-INC	✓	✓	✓	–	–	–
2	Dry contact pulse (relay contact)	INA-INB	✓	–	–	–	–	✓
3	Voltage pulse	INB-INC	✓	✓	✓	–	–	–
4	2-wire transmitter current pulse (4 to 20 mA)	INA-INB	✓	✓	–	✓	✓(*3)	–
5	3-wire transmitter voltage pulse	INA-INB-INC	✓	✓	✓	–	–	–


- \*1: Five input modes are available. Select an appropriate transmitter power supply and shunt resistance according to the input mode. Refer to examples of connections and settings for input modes. T20E.EPS
- \*2: Maximum input frequency is 800 Hz when dry contact pulse (open-collector contact) input mode is selected.
- \*3: When a 500Ω shunt resistance is selected, note the limitations below:
- No module may be installed next to the pulse input module (NFAP135).
  - Use the pulse input module (NFAP135) with up to four inputs.

**Pulse Input Module (NFAP135):**

**Examples of connections and settings depending on the input mode:**

(In the following diagrams, SW1 is a switch for enabling/disabling shunt resistance RL, and SW2 is for enabling/disabling chattering elimination filter FIL.)


**1. An example of connecting a dry contact pulse (open-collector contact)**

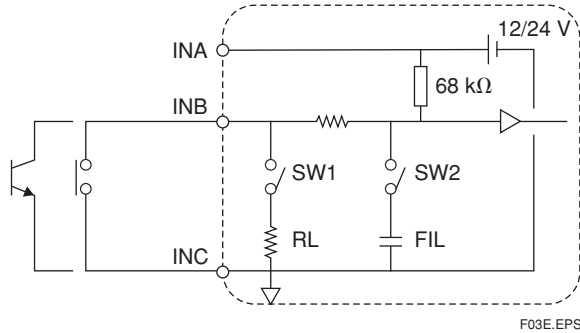

F03E.EPS

SW1 (RL): OFF  
SW2 (FIL): ON when necessary


**2. An example of connecting a dry contact pulse (relay contact)**

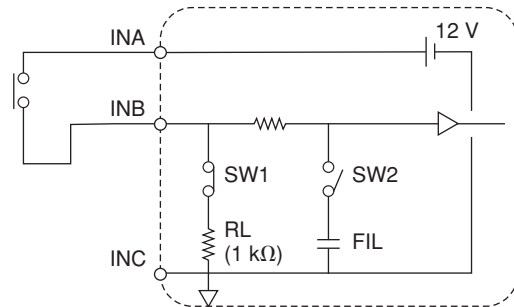

F04E.EPS

SW1 (RL: 1 kΩ): ON  
SW2 (FIL): ON when necessary


**3. An example of connecting a voltage pulse**

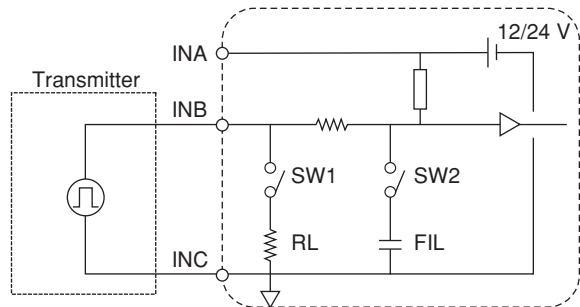

F05E.EPS

SW1 (RL): OFF  
SW2 (FIL): ON when necessary


**4. An example of connecting a 4-20 mA current pulse from a two-wire transmitter**

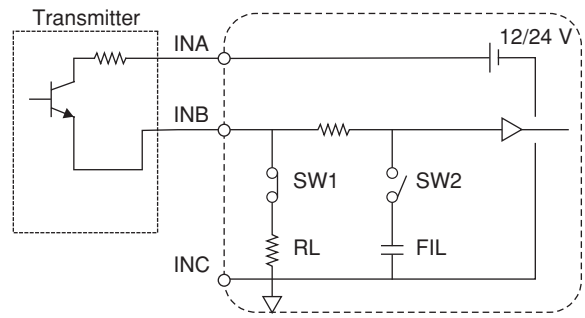

F06E.EPS

SW1 (RL): Either 200 Ω or 500 Ω(\*1) to be used  
\*1: If a 500 Ω shunt resistance is used, note the installation limitations specified.  
SW2 (FIL): ON when necessary

**5. An example of connecting a voltage pulse from a three-wire transmitter**

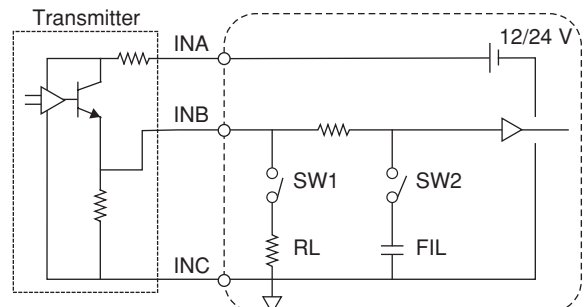


F07E.EPS

SW1 (RL): OFF  
SW2 (FIL): ON when necessary

## EXTERNAL DIMENSIONS

- NFAI141, NFAV141, NFAV142, NFAV144, NFAI841, NFAB841, NFAV542, NFAV544, NFAI143, NFAI543, NFAT141, NFAR181, NFAI135, NFAI835, NFAP135 Analog I/O Modules

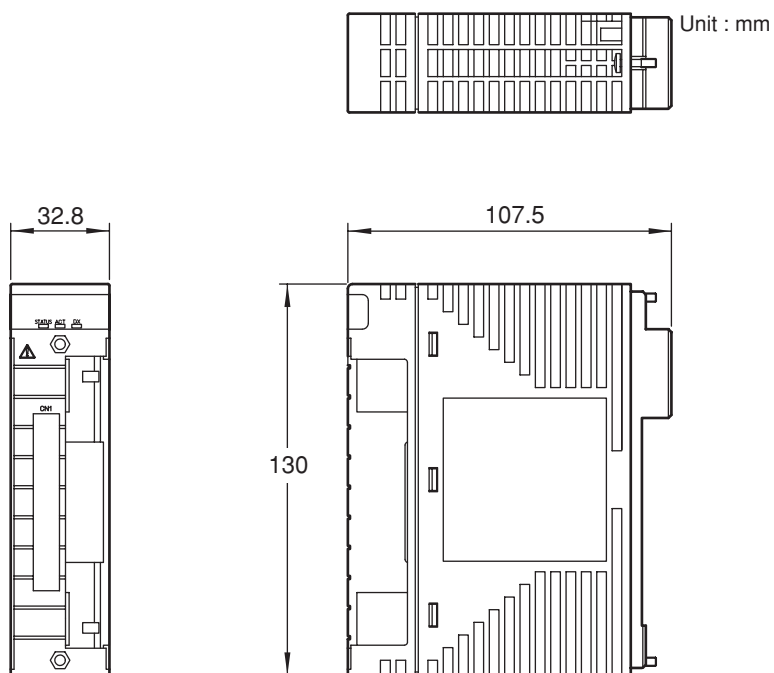

F02E.EPS

## LEDs

- Status Indicators

LED Indicator	Color	Description
STATUS	Green	Lights when the hardware is normal
ACT	Green	Lights when input/output actions are carried out
DX	Green	Not used

T08E.EPS

## MODELS AND SUFFIX CODES

		Description
<b>Model</b>	NFAI135	Analog Input Module (4 to 20mA, 8-channel, Isolated channels)
<b>Suffix Codes</b>	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/13S00	With Pressure Clamp Terminal Block for Isolated Analog [Model: NFTI3S-00]
	/13S10	With Pressure Clamp Terminal Block for Isolated Analog (surge absorber) [Model: NFTI3S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T09E.EPS

		Description
<b>Model</b>	NFAI835	Analog I/O Module (4 to 20mA, 4-channel input/4-channel output, Isolated channels)
<b>Suffix Codes</b>	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/13S00	With Pressure Clamp Terminal Block for Analog [Model: NFTI3S-00]
	/13S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTI3S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T10E.EPS

		Description
<b>Model</b>	NFAP135	Pulse Input Module (8-channel, Pulse count, 0 to 10kHz, Isolated channels)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/13S00	With Pressure Clamp Terminal Block for Pulse [Model: NFTI3S-00]
	/13S10	With Pressure Clamp Terminal Block for Pulse (surge absorber) [Model: NFTI3S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T11E.EPS

		Description
<b>Model</b>	NFAT141	TC/mV Input Module (16-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/T4S00	With Pressure Clamp Terminal Block for Thermocouple/mV [Model: NFTT4S-00]
	/T4S10	With Pressure Clamp Terminal Block for Thermocouple/mV (surge absorber) [Model: NFTT4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T12E.EPS

		Description
<b>Model</b>	NFAR181	RTD Input Module (12-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/R8S00	With Pressure Clamp Terminal Block for RTD [Model: NFTR8S-00]
	/R8S10	With Pressure Clamp Terminal Block for RTD (surge absorber) [Model: NFTR8S-10]

T13E.EPS

		Description
<b>Model</b>	NFAI141	Analog Input Module (4 to 20mA, 16-channel, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T14E.EPS

		Description
<b>Model</b>	NFAV141	Analog Input Module (1 to 5V, 16-channel, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T15E.EPS

		Description
<b>Model</b>	NFAV142	Analog Input Module (-10 to +10V, 16-channel, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T16E.EPS

		Description
<b>Model</b>	NFAV144	Analog Input Module (-10 to +10V, 16-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T27E.EPS

		Description
<b>Model</b>	NFAV542	Analog Output Module (-10 to +10V, 16-channel, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard Type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model : NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model : NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model : NFCCC01]

T17E.EPS

		Description
<b>Model</b>	NFAV544	Analog Output Module (-10 to +10V, 16-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T28E.EPS

		Description
<b>Model</b>	NFAI143	Analog Input Module (4 to 20mA,16-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard Type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T23E.EPS

		Description
<b>Model</b>	NFAI543	Analog Output Module (4 to 20mA,16-channel, Isolated)
<b>Suffix Codes</b>	-S	Standard Type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model: NFCCC01]

T24E.EPS

		Description
<b>Model</b>	NFAI841	Analog I/O Module (4 to 20mA input , 4 to 20mA output, 8-channel input/8-channel output, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model : NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model : NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model : NFCCC01]

T18E.EPS

		Description
<b>Model</b>	NFAB841	Analog I/O Module (1 to 5V input, 4 to 20mA output, 8-channel input/8-channel output, Non-Isolated)
<b>Suffix Codes</b>	-S	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option
<b>Option Codes</b>	/A4S00	With Pressure Clamp Terminal Block for Analog [Model : NFTA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model : NFTA4S-10]
	/CCC01	With Connector Cover for MIL Cable [Model : NFCCC01]

T19E.EPS

---

## ■ RESTRICTIONS AND PRECAUTIONS ON INSTALLATION

See Installation Guide for FCN/FCJ Autonomous Controllers, TI 34P02Q91-01E.

### ● Limitations of Installation for NFAT141 (the combination of Thermocouple input and Pressure clamp terminal)

To keep the reference junction compensation accuracy (GS 34P02Q31-01E), make sure to meet the following conditions. The pressure clamp terminal should not be affected by radiated heat.

- Do not install a heat-radiating unit beneath the NFAT141 installed unit.
- Do not install NFAT141 in the place where airflow affects directly.
- Do not install NFAT141 next to the CPU modules (NFPC100), power supply modules (NFPW44x).
- The installable modules next to the NFAT141 are as follows. When installing other than following I/O modules, make an empty slot (one or more) in each side.  
Installable modules: NFAT141, NFAR181, NFAV141, NFAV142, NFAV144, NFAV542

### ● Limitations of Installation for I/O Modules

When you install the following I/O modules, ensure that the required power volume does not exceed the rated power output of the power supply module. For the amount of power supply that each I/O module requires (5 V DC and 24 V DC), refer to the applicable general specifications.

- The following modules need to be checked for current consumption from a 5 V DC system power supply  
NFAV544, NFDV551, NFDV561 and NFDR541
- The following modules need to be checked for current consumption from a 24 V DC analog field power supply  
NFAI841, NFAI143 and NFAI543

## ■ ORDERING INSTRUCTION

Specify models and suffix codes.

## ■ TRADEMARK

- STARDOM is a trademark of Yokogawa Electric Corporation.
- Other company names and product names in this document are registered trademarks or trademarks of their respective holders.