

\*1: When Optional code K1, K2, K5, or K6 is selected, add 15 mm(0.59 inch) to the value in the figure.

Diaphragm extension length code

- 2:  $X_2 = 50$  mm (2-inch)
- 4:  $X_2 = 100$  mm (4-inch)
- 6:  $X_2 = 150$  mm (6-inch)


### Flange size: 4-inch (100 mm)

Flange Nominal Diameter and Rating	$\phi D$	$\phi C$	$\phi g$	$\phi A$	t	Bolt Holes	
						No.(n)	Dia.( $\phi h$ )
JIS 10K	210(8.27)	175(6.89)	155(6.10)	$96 \pm 0.5(3.78)$	18(0.71)	8	19(0.75)
JIS 20K	225(8.86)	185(7.28)	155(6.10)	$96 \pm 0.5(3.78)$	24(0.94)	8	23(0.91)
ANSI Class150	228.6(9.00)	190.5(7.50)	155(6.10)	$96 \pm 0.5(3.78)$	23.9(0.94)	8	19.1(0.75)
ANSI Class300	254(10.00)	200.2(7.88)	155(6.10)	$96 \pm 0.5(3.78)$	31.8(1.25)	8	22.4(0.88)
JPI Class150	229(9.02)	190.5(7.50)	155(6.10)	$96 \pm 0.5(3.78)$	24(0.94)	8	19(0.75)
JPI Class300	254(10.00)	200.2(7.88)	155(6.10)	$96 \pm 0.5(3.78)$	32(1.26)	8	22(0.87)
DIN PN 10/16	220(8.66)	180(7.09)	155(6.10)	$96 \pm 0.5(3.78)$	20(0.79)	8	18(0.71)
DIN PN 25/40	235(9.25)	190(7.50)	155(6.10)	$96 \pm 0.5(3.78)$	24(0.94)	8	22(0.87)

### Flange size: 3-inch (80 mm)

Flange Nominal Diameter and Rating	$\phi D$	$\phi C$	$\phi g$	$\phi A$	t	Bolt Holes	
						No.(n)	Dia.( $\phi h$ )
JIS 10K	185(7.28)	150(5.91)	130(5.12)	$71 \pm 0.5(2.80)$	18(0.71)	8	19(0.75)
JIS 20K	200(7.87)	160(6.30)	130(5.12)	$71 \pm 0.5(2.80)$	22(0.87)	8	23(0.91)
ANSI Class150	190.5(7.50)	152.4(6.00)	130(5.12)	$71 \pm 0.5(2.80)$	23.9(0.94)	4	19.1(0.75)
ANSI Class300	209.6(8.25)	168.1(6.62)	130(5.12)	$71 \pm 0.5(2.80)$	28.5(1.12)	8	22.4(0.88)
JPI Class150	190(7.48)	152.4(6.00)	130(5.12)	$71 \pm 0.5(2.80)$	24(0.94)	4	19(0.75)
JPI Class300	210(8.27)	168.1(6.62)	130(5.12)	$71 \pm 0.5(2.80)$	28.5(1.12)	8	22(0.87)
DIN PN 10/16	200(7.88)	160(6.30)	130(5.12)	$71 \pm 0.5(2.80)$	20(0.79)	8	18(0.71)
DIN PN 25/40	200(7.87)	160(6.30)	130(5.12)	$71 \pm 0.5(2.80)$	24(0.94)	8	18(0.71)

### Terminal Configuration

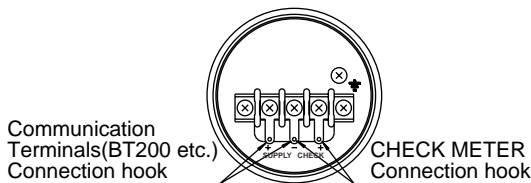

### Terminal Wiring

SUPPLY $\pm$	Power supply and output terminal
CHECK $\pm$	External indicator(ammeter) terminal
$\text{⏏}$	Ground terminal