

# General Specifications

Model NT182AJ  
ASTMAC Viewer Client



GS 34P02D02-01E

## ■ GENERAL

Installed in a personal computer inside an ASTMAC (\*1) system to embody a client station, ASTMAC Viewer Client provides the runtime environment for remotely linking with a master station via a control LAN and running graphics applications.


\*1: ASTMAC is Japanese domestic market only (Not sale for overseas).

## ■ SYSTEM REQUIREMENTS

- Personal computer: PC/AT-compatible computer
- CPU: At least Pentium II 400 MHz (Pentium III 700 MHz recommended)
- Memory: At least 128 MB (256 MB recommended)
- Hard disk: At least 2 GB
- Parallel (Centronics) or USB port:  
Required to install an ID module.
- CD-ROM drive: A CD-ROM drive that is supported by the operating system specified at the bottom is required.
- Ethernet adapter: A 10BASE-5, 10BASE-T, or 100BASE-TX adapter that is supported by the operating system specified at the bottom is required.
- Backup storage: An MO, digital audio tape, CD-RW or other removable storage drive that is supported by the operating system specified at the bottom is required for backup.
- Display: At least 1024 x 768 pixels, at least 256 colors (A display with a resolution of 800 x 600 pixels can be used for maintenance, but the said specification is recommended for runtime operation.)
- Printer: A laser printer or color printer for A4-size paper (that is supported by the operating system specified at the bottom) is required. An ESC/P code-enabled serial printer is required for alarm printing.
- Operating system: Windows 2000 Professional Service Pack 2

## ■ FUNCTION SPECIFICATIONS

A client station can run an application form created using Graphic Builder in a full-time version of ASTMAC Base Type. ASTMAC Viewer Client provides only the runtime environment and does not provide the development environment in which various Builder programs can run. For development such as configuring a system, and developing and debugging applications, use a full-time version of ASTMAC Base Type.

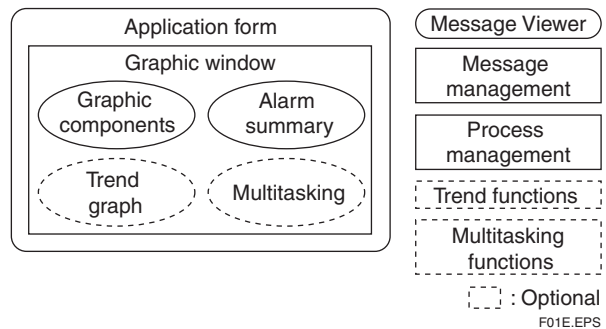

## ■ MODEL AND SUFFIX CODES

		Description
<b>Model</b>	NT182AJ	ASTMAC Viewer Client
<b>Suffix Codes</b>	-L	License
	U	ID module for USB port
	P	ID module for printer (Centronics) port
	1	Always 1
	1	Always 1
	E	English version

T01E.EPS

## ■ ORDERING INSTRUCTIONS

Specify the model and suffix codes.

## ■ RELATED DOCUMENTS

- ASTMAC Overview, GS 34P02A03-01E
- ASTMAC Base Type, GS 34P02D01-01E

---

## ■ TRADEMARKS

- STARDOM is a trademark of Yokogawa Electric Corporation.
- Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries.
- Ethernet is a registered trademark of Xerox Corporation, the United States.
- Pentium is a registered trademark of Intel Corporation.
- Other company and product names appearing in this document are trademarks or registered trademarks of their respective holders.